

ADCAT™ CO Catalyst

for CO, VOCs, Formaldehyde Oxidation

ADCAT™ CO/VOC oxidation catalyst yields optimal conversion efficiencies with reduced catalyst volume for the lowest capital cost.

Heavy-duty stainless steel module design:

- High temperature nickel alloy substrate.
- Durable, longest-lasting, highest performance catalyst available.
- Catalyst module cell densities up to 700 cpsi.

Discrete cell substrate construction:



- Ensures maximum durability and extreme module mechanical integrity.
- Yields lowest possible pressure drop for the most surface area.
- Prevents plugging of inter-catalyst channels and substrate nesting, which cause exhaust bypass and precious metal loss.

Flexibility for meeting future regulations:

- Individually mounted module design, allows for addition and replacement of catalyst modules to existing installations.
- Backed with a three-year warranty and has an expected life of greater than seven years.
- Broad operating temperature range (350 to 1200 °F) allows for simple and seamless integration of CO catalyst systems into all applications.

PCA, Inc. is a leading, full-service provider of catalysts and catalytic solutions with resources encompassing every aspect required to satisfy customer needs, from analyzing process conditions to delivering the final product.

PCA, Inc. delivers distinctly-focused, customer-specific engineered solutions within budget and on schedule.

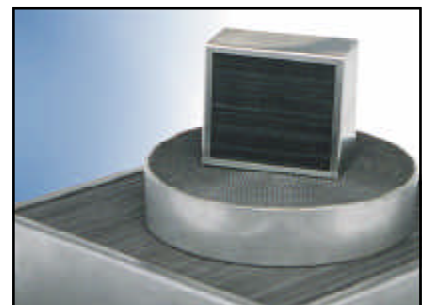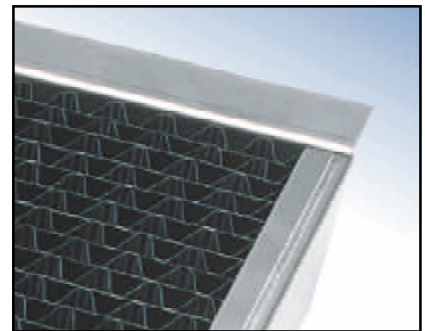


ADCAT™ CO Catalyst: Technical Specifications

Type	Material	Properties	Units	Specifications							
Honeycomb Monolith	Metal Modules	Cell Density	epsi	200	300	400	500	600	700		
		Wall Thickness	in.	0.002	0.002	0.001/0.002	0.001/0.002	0.001/0.002	0.001/0.002		
		Geometric Surface Area	in ² /in ³	76.24	97.70	115.10	124.31	145.32	165.55		
		Maximum Temperature	°F	1,200	1,200	1,200	1,200	1,200	1,200		
		Coefficient of Thermal Expansion	x10 ⁻⁶ in/in/°F	5.9-8.0	5.9-8.0	5.9-8.0	5.9-8.0	5.9-8.0	5.9-8.0		
		Range of Dimensions	Blocks	Height	in.	≤36	≤36	≤36	≤36	≤36	≤36
				Width	in.	≤36	≤36	≤36	≤36	≤36	≤36
				Depth*	in.	1-6	1-6	1-6	1-6	1-6	1-6
			Round	Diameter	in.	≤36	≤36	≤36	≤36	≤36	≤36
				Depth*	in.	1-6	1-6	1-6	1-6	1-6	1-6
	Ceramic Modules	Wall Thickness	in.	0.0105	0.0080	0.0070	n/a	n/a	n/a		
		Geometric Surface Area	in ² /in ³	48.20	59.70	68.80	n/a	n/a	n/a		
		Maximum Temperature	°F	1,200	1,200	1,200	n/a	n/a	n/a		
		Coefficient of Thermal Expansion	x10 ⁻⁶ in/in/°F	3.91	3.91	3.91	n/a	n/a	n/a		
		Range of Dimensions	Blocks	Height	in.	≤42	≤42	≤42	n/a	n/a	n/a
				Width	in.	≤42	≤42	≤42	n/a	n/a	n/a
Depth*				in.	1-7	1-7	1-7	n/a	n/a	n/a	
Round			Diameter	in.	≤42	≤42	≤42	n/a	n/a	n/a	
	Depth*		in.	1-7	1-7	1-7	n/a	n/a	n/a		


Listed numbers are nominal values. PCA, Inc. offers catalyst modules in various shapes and sizes.

*For greater depths, multiple units may be stacked to obtain desired dimensions.


Catalyst Substrate Pressure Drop Comparison

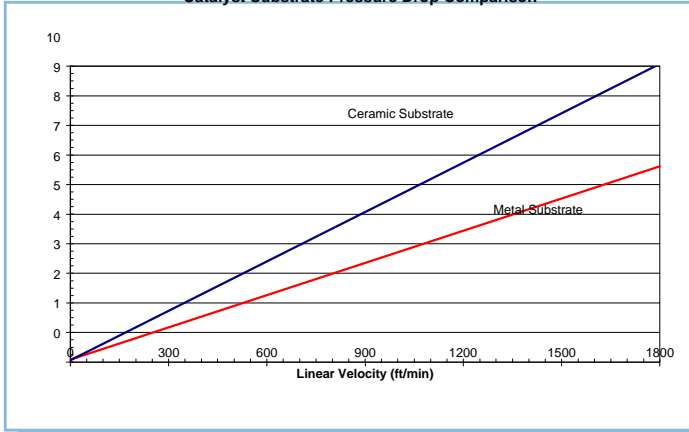

Substrate Geometric Surface Area (GSA) Comparison

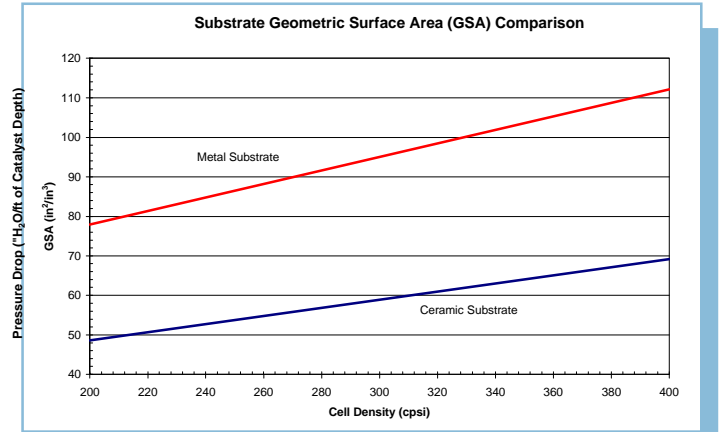

ADCAT™ CO Catalyst Performance as a Function of Temperature at a Constant Space Velocity

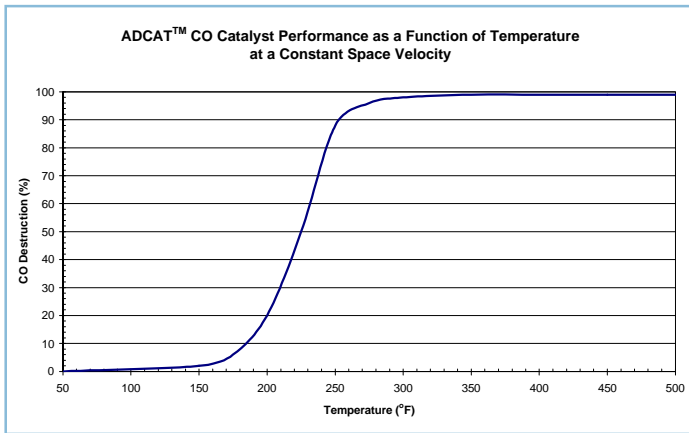

Inquiries:

Send us specifications, drawings or gas stream data and we will provide you with a custom-tailored solution to your specific application. PCA, Inc. also provides analytical and technical services to assist in determining your current emissions and catalytic performance.

PCA, Inc. is a proven leader in the catalytic control of NO_x, SO_x, CO, VOCs and PM for manufacturing and industrial applications as well as for the power generation industry.

PCA, Inc.
 3791 N Tamarack
 Crystal Lake, IL 60012
 Tel: 815-356-7499
 Fax: 815-356-0068

email: dennisk@pcaincorporated.com